


Powerful hydraulic auger with many different auger diameters to suit various tasks, be it post hole boring, tree transplanting etc. Standard drive unit has hydraulic motor and direct drive to the auger. Heavy duty drive unit is equipped with planetary drive to increase torque, needed especially in hard ground conditions or when using large diameter augers.

Replaceable tungsten teeth and pilot head are a standard feature in the auger drills. This enables drilling in hard ground as well as in sandstone.

Combination of an articulated Avant and auger offer excellent visibility and minimum ground damage.

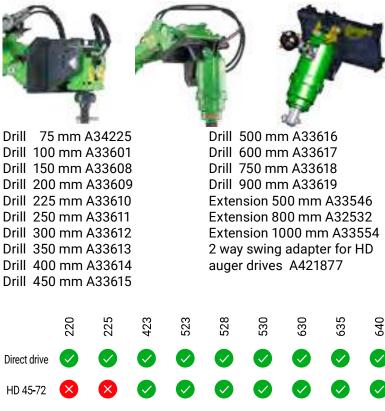

- Wide range of auger drive units with different torques enables efficient use of 75 mm to 900 mm auger drills
- The right drive unit for your work depends on the maximum drill diameter needed. Choose the drive unit from the table below
- The replaceable tungsten teeth and center pilot on all auger drills ensure long lifespan also on professional day to day use
- 2 way swing adapter for HD auger drives. Allows the auger and auger drive to swing sideways also, which means that the hole can be drilled straight no matter how the machine is positioned.

	Model		Drills			Torque	Pro	od. no
	Direct drive		75-300 mm			1355 Nm	A3	87190
	HD 45		75 - 600 mm			2452 Nm	A3	3552
	HD 58		75-750 mm		nm	3017 Nm	A3	3551
	HD 72		75 - 900 mm		nm	3874 Nm	A3	4032
	645i	650i	735	755i	760i	860i	e5	e6
					~		Ŧ	Ŧ
					~		ŧ	ŧ
ompatible 🕂 adaptable 🗙 incompatible							tible	127

cc

Compatibility tables are advisory. Please contact your local Avant UK DEALER to make sure that the attachment is compatible with your Avant loader.