




Electric Machine Compatible

# Backhoe 260

Backhoe 260 has many improved features: Boom swing happens with two hydraulic cylinders, instead of the single cylinder and chain drive in the old models. The new system gives more exact boom movements when swinging and requires less service. Swing angle is 170 degrees. Backhoe 260 is equipped with hydraulic outriggers as standard. The operator can easily adjust the outriggers with the lever on the backhoe control valve. This allows quick and easy set up also on uneven terrains. Changing of bucket is easy thanks to the quick attach mechanism. Mounting the backhoe on Avant is very fast, and the new foldable control valve bank and locking system on the boom make it even easier.

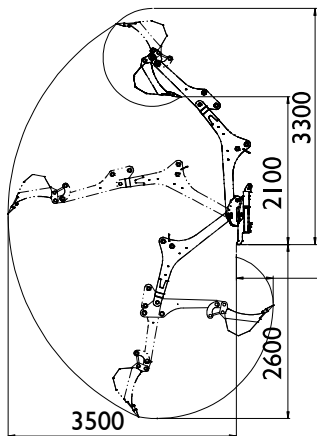

**Optional extras:**

- Bucket 250 mm A414301
- Bucket 750 mm A35230
- Bucket 1000 mm A35383
- Bucket tilt adapter S30-150 with sideways tilt A35249 (not when thumb grab A435527)
- Trapezoidal bucket 650 mm A21638
- Trapezoidal bucket 912 mm A36374
- Thumb grab A435527 (not when bucket tilt adapter A35249)



- ✔ **Powerful and professional backhoe with good outreach**
- ✔ **Hydraulic outriggers**
- ✔ **Bucket quick attach system S30-150**
- ✔ **170 degree boom swing angle with consistent speed**
- ✔ **Dozer blade on front frame**
- ✔ **Several bucket options**
- ✔ **Bucket sideways tilt adapter available as an option**
- ✔ **Thumb grab available as an option, for handling stones etc. objects**

Max. Digging depth	2600 mm
Width	1300 mm
Boom swing angle	170 °
Standard bucket	400 mm
Weight	420 kg
Product no	A37510

220	225	423	523	528	530	630	635	640	645i	650i	735	755i	760i	860i	e5	e6
✗	✗	✗	+	✔	✔	✔	✔	✔	✔	✔	✔	✔	✔	✗	✔	✔

Compatibility tables are advisory. Please contact your local Avant UK DEALER to make sure that the attachment is compatible with your Avant loader.