


VERTICAL LIFT



Capacities	Metric	Imperial
Operating Capacity At 50% Tipping Load	1267.37 kg	2750 lb
Operating Weight	3774 kg	8320 lb
Unladen weight	3426 kg	7553 lb
Tipping capacity	2495 kg	5501 lb
Weight and dimensions		
Operating Weight - Approximate	3774 kg	8320 lb
Overall Operating Height - Fully Raised	4252 mm	167 in
Height to Hinge Pin - Fully Raised	3277 mm	129 in
Overall Height to top of ROPS	2058 mm	81 in
Dump angle at full height	42 °	42 °
Dump height	2489 mm	98 in
Overall length with bucket	3810 mm	150 in
Dump reach - Full height	830 mm	33 in
Rollback Angle at Full Height	92 °	92 °
Seat to ground height	978 mm	39 in
Overall width less bucket	1712 mm	67 in
Ground clearance	216 mm	9 in
Overall length - Less Bucket	3023 mm	119 in
Clearance Radius - Front with Bucket	2289 mm	90 in
Clearance Circle - Front without Bucket	1410 mm	56 in
Clearance Circle - Rear	1829 mm	72 in
Performances		
Travel Speed with Two-Speed Option - Maximum	17.50 km/h	11 mph
Travel speed (unladen)	11.40 km/h	7 mph
Engine		
Engine brand	Yanmar	Yanmar
Engine model	4TNV98CT-XNGL	4TNV98CT-XNGL
Engine norm	Stage V	Stage V
Gross Power (kW)	53.70 kW	72 hp
Net Power (kW)	52.70 kW	70.7 hp
Max. torque / Engine rotation	294 Nm / 1800 rpm	217 ft/lbs / 1800 rpm
Number of cylinders	4	4
Engine cooling system	Water	Water
Battery voltage	12 V	12 V
Alternator - Ampere	100 A	100 A
Starter (kW)	3 kW	4 hp
Hydraulics		
Standard flow - Auxiliary hydraulics	98.40 l/min	26 US gpm
Auxiliary Hydraulic Pressure	239.59 bar	3475 PSI
High-Flow Auxiliary Hydraulics - Option	126 l/min	33 US gpm
High-Flow Auxiliary Hydraulics Pressure - Option	229.25 bar	3325 PSI
Tank capacities		
Fuel tank	106 l	28 US gal
Reservoir Capacity Hydraulics	22.70 l	6 US gal
Displacement	3.30 l	0.87 US gal
Coolant system capacity	18 l	5 US gal

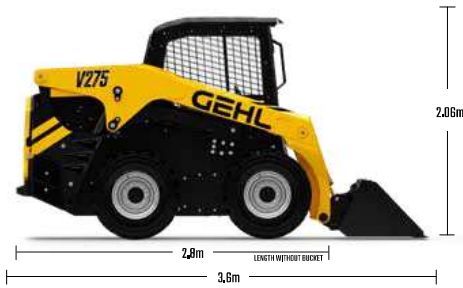

V275

CONTROL TYPES

STANDARD



JOYSTICK

With the V275 vertical lift Skid Loader, you don't have to choose between mobility and lifting power. The powerful V275 is built for maximum maneuverability in the most confined workspaces, while offering higher dumping heights and 2,750 lbs. of rated operating capacity. From construction sites to road-building projects, this machine moves with ease from task to task. Intuitive controls enable precision movement and a spacious cab with improved visibility helps you keep tabs on the ground and surrounding environment. Plus, its centralized maintenance point keeps you working for longer by reducing service time and labor. You don't have to compromise on strength or mobility — the V275 is proof that you can have it all and in one machine.

1179 kg
OPERATING CAPACITY
[AT 50% TIPPING LOAD]

3.1 m
HEIGHT TO HINGE PIN
[FULLY RAISED]

1.8 m
BUCKET WIDTH
[STANDARD]